

ATTACHMENT A

Borehole Records

LIST OF ABBREVIATIONS

The abbreviations commonly employed on Records of Boreholes, on figures, and in the text of the report are as follows:

I. SAMPLE TYPE

AS	Auger sample
BS	Block sample
CS	Chunk sample
DO or DP	Seamless open-ended, driven or pushed tube samplers
DS	Denison type sample
FS	Foil sample
RC	Rock core
SC	Soil core
SS	Split spoon sampler
ST	Slotted tube
TO	Thin-walled, open
TP	Thin-walled, piston
WS	Wash sample
DT	Dual tube sample
DD	Diamond drilling

II. PENETRATION RESISTANCE

Standard Penetration Resistance (SPT), N:

The number of blows by a 63.5 kg. (140 lb.) hammer dropped 760 mm (30 in.) required to drive a 50 mm (2 in.) split spoon sampler for a distance of 300 mm (12 in.).

Dynamic Cone Penetration Resistance (DCPT); N_d :

The number of blows by a 63.5 kg (140 lb.) hammer dropped 760 mm (30 in.) to drive an uncased 50 mm (2 in.) diameter, 60° cone attached to "A" size drill rods for a distance of 300 mm (12 in.).

PH:	Sampler advanced by hydraulic pressure
PM:	Sampler advanced by manual pressure
WH:	Sampler advanced by static weight of hammer
WR:	Sampler advanced by weight of sampler and rod

Cone Penetration Test (CPT):

An electronic cone penetrometer with a 60° conical tip and a projected end area of 10 cm² pushed through ground at a penetration rate of 2 cm/s. Measurements of tip resistance (q_t), porewater pressure (u) and friction along a sleeve are recorded electronically at 25 mm penetration intervals.

III. SOIL DESCRIPTION

(a)	Cohesionless Soils	
	Density Index	N
	(Relative Density)	<u>Blows/300 mm</u>
		<u>Or Blows/ft.</u>
	Very loose	0 to 4
	Loose	4 to 10
	Compact	10 to 30
	Dense	30 to 50
	Very dense	over 50
(b)	Cohesive Soils	
	C_u or S_u	
	Consistency	
		<u>kPa</u>
		<u>Psf</u>
	Very soft	0 to 12
	Soft	12 to 25
	Firm	25 to 50
	Stiff	50 to 100
	Very stiff	100 to 200
	Hard	Over 200
		0 to 250
		250 to 500
		500 to 1,000
		1,000 to 2,000
		2,000 to 4,000
		Over 4,000

IV. SOIL TESTS

w	Water content
w_p or PL	Plastic limited
w_l or LL	Liquid limit
C	Consolidation (oedometer) test
CHEM	Chemical analysis (refer to text)
CID	Consolidated isotropically drained triaxial test ¹
CIU	Consolidated isotropically undrained triaxial test with porewater pressure measurement ¹
D_R	Relative density
DS	Direct shear test
G _s	Specific gravity
M	Sieve analysis for particle size
MH	Combined sieve and hydrometer (H) analysis
MPC	Modified Proctor compaction test
SPC	Standard Proctor compaction test
OC	Organic content test
SO ₄	Concentration of water-soluble sulphates
UC	Unconfined compression test
UU	Unconsolidated undrained triaxial test
V	Field vane test (LV-laboratory vane test)
γ	Unit weight

Note: ¹ Tests which are anisotropically consolidated prior shear are shown as CAD, CAU.

LIST OF SYMBOLS

Unless otherwise stated, the symbols employed in the report are as follows:

I. GENERAL

π	3.1416
$\ln x$	natural logarithm of x
$\log_{10} x$ or $\log x$	logarithm of x to base 10
g	acceleration due to gravity
t	time
FOS	factor of safety
V	volume
W	weight

II. STRESS AND STRAIN

γ	shear strain
Δ	change in, e.g. in stress: $\Delta \sigma'$
ϵ	linear strain
ϵ_v	volumetric strain
η	coefficient of viscosity
ν	Poisson's ratio
σ	total stress
σ'	effective stress ($\sigma' = \sigma - u$)
σ'_{vo}	initial vertical effective overburden stress
$\sigma_1 \sigma_2 \sigma_3$	principal stresses (major, intermediate, minor)
σ_{oct}	mean stress or octahedral stress $= (\sigma_1 + \sigma_2 + \sigma_3) / 3$
τ	shear stress
u	porewater pressure
E	modulus of deformation
G	shear modulus of deformation
K	bulk modulus of compressibility

III. SOIL PROPERTIES

(a) Index Properties

$\rho(\gamma)$	bulk density (bulk unit weight)*
$\rho_d(\gamma_d)$	dry density (dry unit weight)
$\rho_w(\gamma_w)$	density (unit weight) of water
$\rho_s(\gamma_s)$	density (unit weight) of solid particles
γ'	unit weight of submerged soil ($\gamma' = \gamma - \gamma_w$)
D_R	relative density (specific gravity) of solid particles ($D_R = \rho_s / \rho_w$) formerly (G_s)
e	void ratio
n	porosity
S	degree of saturation
*	Density symbol is ρ . Unit weight symbol is γ where $\gamma = \rho g$ (i.e. mass density multiplied by acceleration due to gravity)

(a) Index Properties (continued)

w	water content
w_l or LL	liquid limit
w_p or PL	plastic limit
I_p or PI	plasticity Index = $(w_l - w_p)$
w_s	shrinkage limit
I_L	liquidity index = $(w - w_p) / I_p$
I_c	consistency index = $(w_l - w) / I_p$
e_{max}	void ratio in loosest state
e_{min}	void ratio in densest state
I_D	density index = $(e_{max} - e) / (e_{max} - e_{min})$ (formerly relative density)

(b) Hydraulic Properties

h	hydraulic head or potential
q	rate of flow
v	velocity of flow
i	hydraulic gradient
k	hydraulic conductivity (coefficient of permeability)
j	seepage force per unit volume

(c) Consolidation (one-dimensional)

C_c	compression index (normally consolidated range)
C_r	recompression index (overconsolidated range)
C_s	swelling index
C_α	coefficient of secondary consolidation
m_v	coefficient of volume change
c_v	coefficient of consolidation (vertical direction)
T_v	time factor (vertical direction)
U	degree of consolidation
σ'_p	pre-consolidation stress
OCR	overconsolidation ratio = σ'_p / σ'_{vo}

(d) Shear Strength

τ_p or τ_r	peak and residual shear strength
ϕ'	effective angle of internal friction
δ	angle of interface friction
μ	coefficient of friction = $\tan \delta$
c'	effective cohesion
c_u or s_u	undrained shear strength ($\phi = 0$ analysis)
p	mean total stress $(\sigma_1 + \sigma_3) / 2$
p'	mean effective stress $(\sigma'_1 + \sigma'_3) / 2$
q	$(\sigma_1 - \sigma_3) / 2$ or $(\sigma'_1 - \sigma'_3) / 2$
q_u	compressive strength $(\sigma_1 - \sigma_3)$
S_t	sensitivity

Notes: ¹ $\tau = c' + \sigma' \tan \phi'$

² shear strength = (compressive strength) / 2

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-1

SHEET 1 OF 1

LOCATION: N 5020218.07 ; E 465752.57

BORING DATE: October 21, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								20	40	60	80	nat V. +	rem V. ⊕			Q - ●	U - ○
0		GROUND SURFACE															
0.00		Brown silty sand, with organic matter (TOPSOIL)															
0.46		Intermixed brown silty sand and red brown silty clay (Probable Fill)			1	53 mm TUBE									Bentonite Seal		
2.18		Red brown SILTY CLAY															
2.44		Intermixed brown SILTY SAND and red brown SILTY CLAY			2	53 mm TUBE									Silica Sand		
2.44		Grey SILTY SAND													32 mm Diam. PVC #10 Slot Screen		
3.65		Red grey SILTY CLAY			3	53 mm TUBE									Cave		
4.57		End of Borehole													WL in Screen at 0.64 m depth below ground surface on Nov. 5, 2013		

CRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

DEPTH SCALE

1 : 75



LOGGED: DG

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-2

SHEET 1 OF 1

LOCATION: N 5020213.93 ; E 465749.43

BORING DATE: October 21, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH				WATER CONTENT PERCENT					
								20 40 60 80		nat V. + Q - rem V. ⊕ U - ○		10 ⁻⁸ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻²				Wp ----- W ----- WI	
0		GROUND SURFACE															
		Brown silty sand, with organic matter (TOPSOIL)		0.00											MON. WELL		
		Red brown silty sand (Probable Fill)		0.30	1	53 mm TUBE									Native Backfill		
															Bentonite Seal		
1															Silica Sand		
		Grey fine sand, trace silt (Probable Fill)		1.22													
2	Geoprobe				2	53 mm TUBE											
3																	
4		Red grey SILTY CLAY		3.81													
					3	53 mm TUBE									Cave		
5		End of Borehole		4.57											WL in Screen at 0.42 m depth below ground surface on Nov. 5, 2013		
6																	
7																	
8																	
9																	
10																	
11																	
12																	
13																	
14																	
15																	

CRRC-SOIL_1211250045.GPJ_GAL-MIS.GDT_11/18/14_JM

DEPTH SCALE

1 : 75



LOGGED: DG

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-3

SHEET 1 OF 1

LOCATION: N 5020223.82 ; E 465747.43

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH				WATER CONTENT PERCENT					
								20 40 60 80		nat V. + Q - rem V. ⊕ U - ⊙		10 ⁻⁸ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻²				Wp ----- W	
0		GROUND SURFACE															
0.91	Geoprobe	Grey crushed stone (ENGINEERED FILL)		0.00											MON. WELL Flush Mount Protective Casing Bentonite Seal Silica Sand 32 mm Diam. PVC #10 Slot Screen Bentonite Seal WL in Screen at 0.66 m depth below ground surface on Nov. 5, 2013		
1.30		Grey brown sandy silt, trace clay (FILL)		0.91	1	53 mm TUBE											
1.52		Grey brown SILTY SAND		1.30													
2.23		Brown SILTY SAND		1.52													
2.23		Red grey SILTY CLAY		2.23	2	53 mm TUBE											
3.05		End of Borehole		3.05													
4																	
5																	
6																	
7																	
8																	
9																	
10																	
11																	
12																	
13																	
14																	
15																	

CRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

DEPTH SCALE

1 : 75



LOGGED: HEC

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-4


SHEET 1 OF 1

LOCATION: N 5020221.09;E 465748.67

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								20 40 60 80		nat V. + rem V. ⊕ U - ○		10 ⁻⁸ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻²				Wp ----- W ----- WI	
0		GROUND SURFACE														MON. WELL	
		Grey crushed stone (ENGINEERED FILL)		0.00													
1	Geoprobe	Brown silty fine sand, trace medium sand (FILL)		0.91	1	53 mm TUBE											
		Grey SILTY SAND		1.12													
		Brown SILTY SAND		1.52													
2		Red grey SILTY CLAY		1.98	2	53 mm TUBE											
	End of Borehole		3.05														
3																	
4																	
5																	
6																	
7																	
8																	
9																	
10																	
11																	
12																	
13																	
14																	
15																	

CRRC-SOIL_1211250045.GPJ_GAL-MIS.GDT_11/18/14_JM



PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-5









SHEET 1 OF 1

LOCATION: N 5020219.28 ; E 465749.50

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH				WATER CONTENT PERCENT					
								20 40 60 80		nat V. + Q - rem V. ⊕ U - ○		10 ⁻⁸ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻²				Wp ----- W ----- WI	
0		GROUND SURFACE															
		Grey crushed stone (ENGINEERED FILL)		0.00											MON. WELL		
1		Brown fine sand, trace gravel (FILL)		0.81	1	53 mm TUBE											
		Dark grey to black silty fine sand to sandy silt, trace gravel and organic matter (TOPSOIL)		1.07													
		Grey SILTY SAND		1.52													
2		Mottled red brown to grey brown SILTY CLAY		1.78													
		Red grey SILTY CLAY		2.44	2	53 mm TUBE									Bentonite Seal		
3																	
4	Geoprobe																
5																	
6		Grey SILTY SAND		5.69	4	53 mm TUBE									Silica Sand		
		Red grey SILTY CLAY		6.17											32 mm Diam. PVC #10 Slot Screen		
7																	
8		End of Borehole		7.62	5	53 mm TUBE									Bentonite Seal		
9																	
10																	
11																	
12																	
13																	
14																	
15																	

CRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

DEPTH SCALE

1 : 75



LOGGED: HEC

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-6

SHEET 1 OF 1


LOCATION: N 5020218.82 ; E 465748.50

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								20		40		60				80	
0		GROUND SURFACE															
0.91	Geoprobe	Grey crushed stone (ENGINEERED FILL)		0.00													
1.52		Brown silty fine sand, trace medium sand, trace organic clay tile (FILL)		0.91	1	53 mm TUBE											
1.52		Dark grey to black silty fine sand, trace gravel, wood and organic matter (TOPSOIL)		1.52													
2.00		Grey brown to red brown SILTY CLAY			2	53 mm TUBE											
3.05		End of Borehole		3.05													

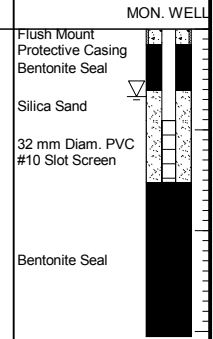

WL in Screen at 0.67 m depth below ground surface on Nov. 5, 2013

CRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM



PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-7








SHEET 1 OF 1


LOCATION: N 5020213.64 ; E 465752.08

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH				WATER CONTENT PERCENT					
								20 40 60 80		nat V. + Q - rem V. ⊕ U - ○		10 ⁻⁸ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻²				Wp ----- W ----- WI	
0		GROUND SURFACE															
		Grey crushed stone (ENGINEERED FILL)		0.00													
1		Brown to grey silty fine sand to sandy silt (FILL)		0.91	1	53 mm TUBE											
		Grey silty fine sand, trace wood and organic matter (TOPSOIL)		1.30													
		Brown to grey brown SILTY SAND		1.52													
2		Red brown to grey SILTY CLAY, with sand seams		2.29	2	53 mm TUBE											
3																	
4	Geoprobe				3	53 mm TUBE											
5																	
		Grey SILTY fine SAND		5.64	4	53 mm TUBE											
6		Red grey SILTY CLAY		6.10													
7																	
8		End of Borehole		7.62	5	53 mm TUBE											
9																	
10																	
11																	
12																	
13																	
14																	
15																	

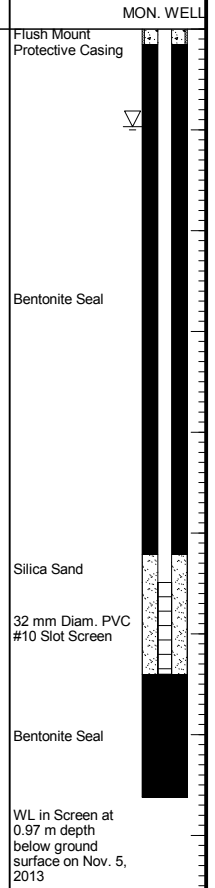

CRRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

DEPTH SCALE

1 : 75



LOGGED: HEC

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-8

SHEET 1 OF 1


LOCATION: N 5020212.73 ;E 465752.50

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION			
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa		nat V. rem V.		WATER CONTENT PERCENT				Wp	W	Wi
								20	40	60	80	+	Q					
0	Geoprobe	GROUND SURFACE																
0.00		Grey crushed stone (ENGINEERED FILL)	[Cross-hatched pattern]	0.00	1	53 mm TUBE												
0.99		Brown silty fine sand (FILL)	[Wavy pattern]	0.99														
1.14		Grey brown silty fine sand, trace clay and black silt (TOPSOIL)	[Wavy pattern]	1.14														
1.52	Red brown SILTY CLAY, some black silt (FILL)	[Cross-hatched pattern]	1.52															
2		Red brown SILTY CLAY, some black silt (FILL)	[Cross-hatched pattern]		2	53 mm TUBE												
2.74	Brown SILTY SAND	[Wavy pattern]	2.74															
3		Red grey SILTY CLAY, trace grey silty fine sand seams	[Cross-hatched pattern]	3.12														
3.12		Red grey SILTY CLAY, trace grey silty fine sand seams	[Cross-hatched pattern]		3	53 mm TUBE												
4		End of Borehole		4.57														
4.57		End of Borehole																
5																		
6																		
7																		
8																		
9																		
10																		
11																		
12																		
13																		
14																		
15																		



WL in Screen at 0.64 m depth below ground surface on Nov. 5, 2013

CRRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

DEPTH SCALE

1 : 75



LOGGED: HEC

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-9

SHEET 1 OF 1


LOCATION: N 5020210.91 ; E 465753.33

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH Cu, kPa				WATER CONTENT PERCENT					
								20	40	60	80	nat V. +	rem V. ⊕			Q - ●	U - ○
0		GROUND SURFACE															
0.00		Grey crushed stone (ENGINEERED FILL)		0.00													
1.07	Geoprobe	Brown fine sand, trace silt (FILL)		1.07	1	53 mm TUBE											
1.22		Brown to grey silty fine sand, some gravel, trace wood, plastic and glass (FILL)		1.22													
1.52		Black to grey brown silty fine sand, some organic matter (TOPSOIL)		1.52													
2.13		Interbedded grey brown SILTY SAND and red brown SILTY CLAY		2.13	2	53 mm TUBE											
2.64		Red brown SILTY CLAY		2.64													
3.05		End of Borehole		3.05													

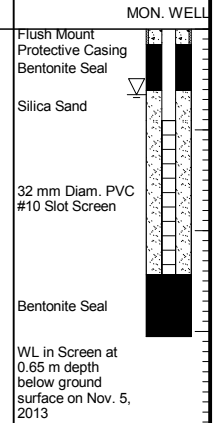

CRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

DEPTH SCALE

1 : 75



LOGGED: HEC

CHECKED: DH

PROJECT: 12-1125-0045-1100

RECORD OF BOREHOLE: B13-10






SHEET 1 OF 1


LOCATION: N 5020208.18 ;E 465754.57

BORING DATE: October 28, 2013

DATUM: Geodetic

INCLINATION: -90° AZIMUTH: ---

DEPTH SCALE METRES	BORING METHOD	SOIL PROFILE		SAMPLES		DYNAMIC PENETRATION RESISTANCE, BLOWS/0.3m				HYDRAULIC CONDUCTIVITY, k, cm/s				ADDITIONAL LAB. TESTING	PIEZOMETER OR STANDPIPE INSTALLATION		
		DESCRIPTION	STRATA PLOT	ELEV. DEPTH (m)	NUMBER	TYPE	BLOWS/0.3m	SHEAR STRENGTH				WATER CONTENT PERCENT					
								20 40 60 80		nat V. + Q - rem V. ⊕ U - ○		10 ⁻⁸ 10 ⁻⁵ 10 ⁻⁴ 10 ⁻²				Wp ----- W ----- Wi	
0		GROUND SURFACE															
		Grey crushed stone (ENGINEERED FILL)		0.00													
1	Geoprobe	Brown silty fine sand, trace clay tile (FILL)		0.84	1	53 mm TUBE											
		Black to grey silty fine sand, trace organic matter (TOPSOIL)		1.14													
		Brown fine SILTY SAND		1.52													
2		Red brown SILTY CLAY		2.29	2	53 mm TUBE											
3		End of Borehole		3.05													
4																	
5																	
6																	
7																	
8																	
9																	
10																	
11																	
12																	
13																	
14																	
15																	

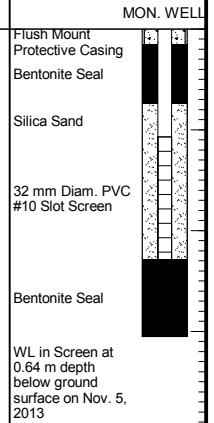

CRRRC-SOIL 1211250045.GPJ GAL-MIS.GDT 11/18/14 JM

